


GENERAL ASSEMBLY AND INFORMATION - FLOODLIT WINDSOCK

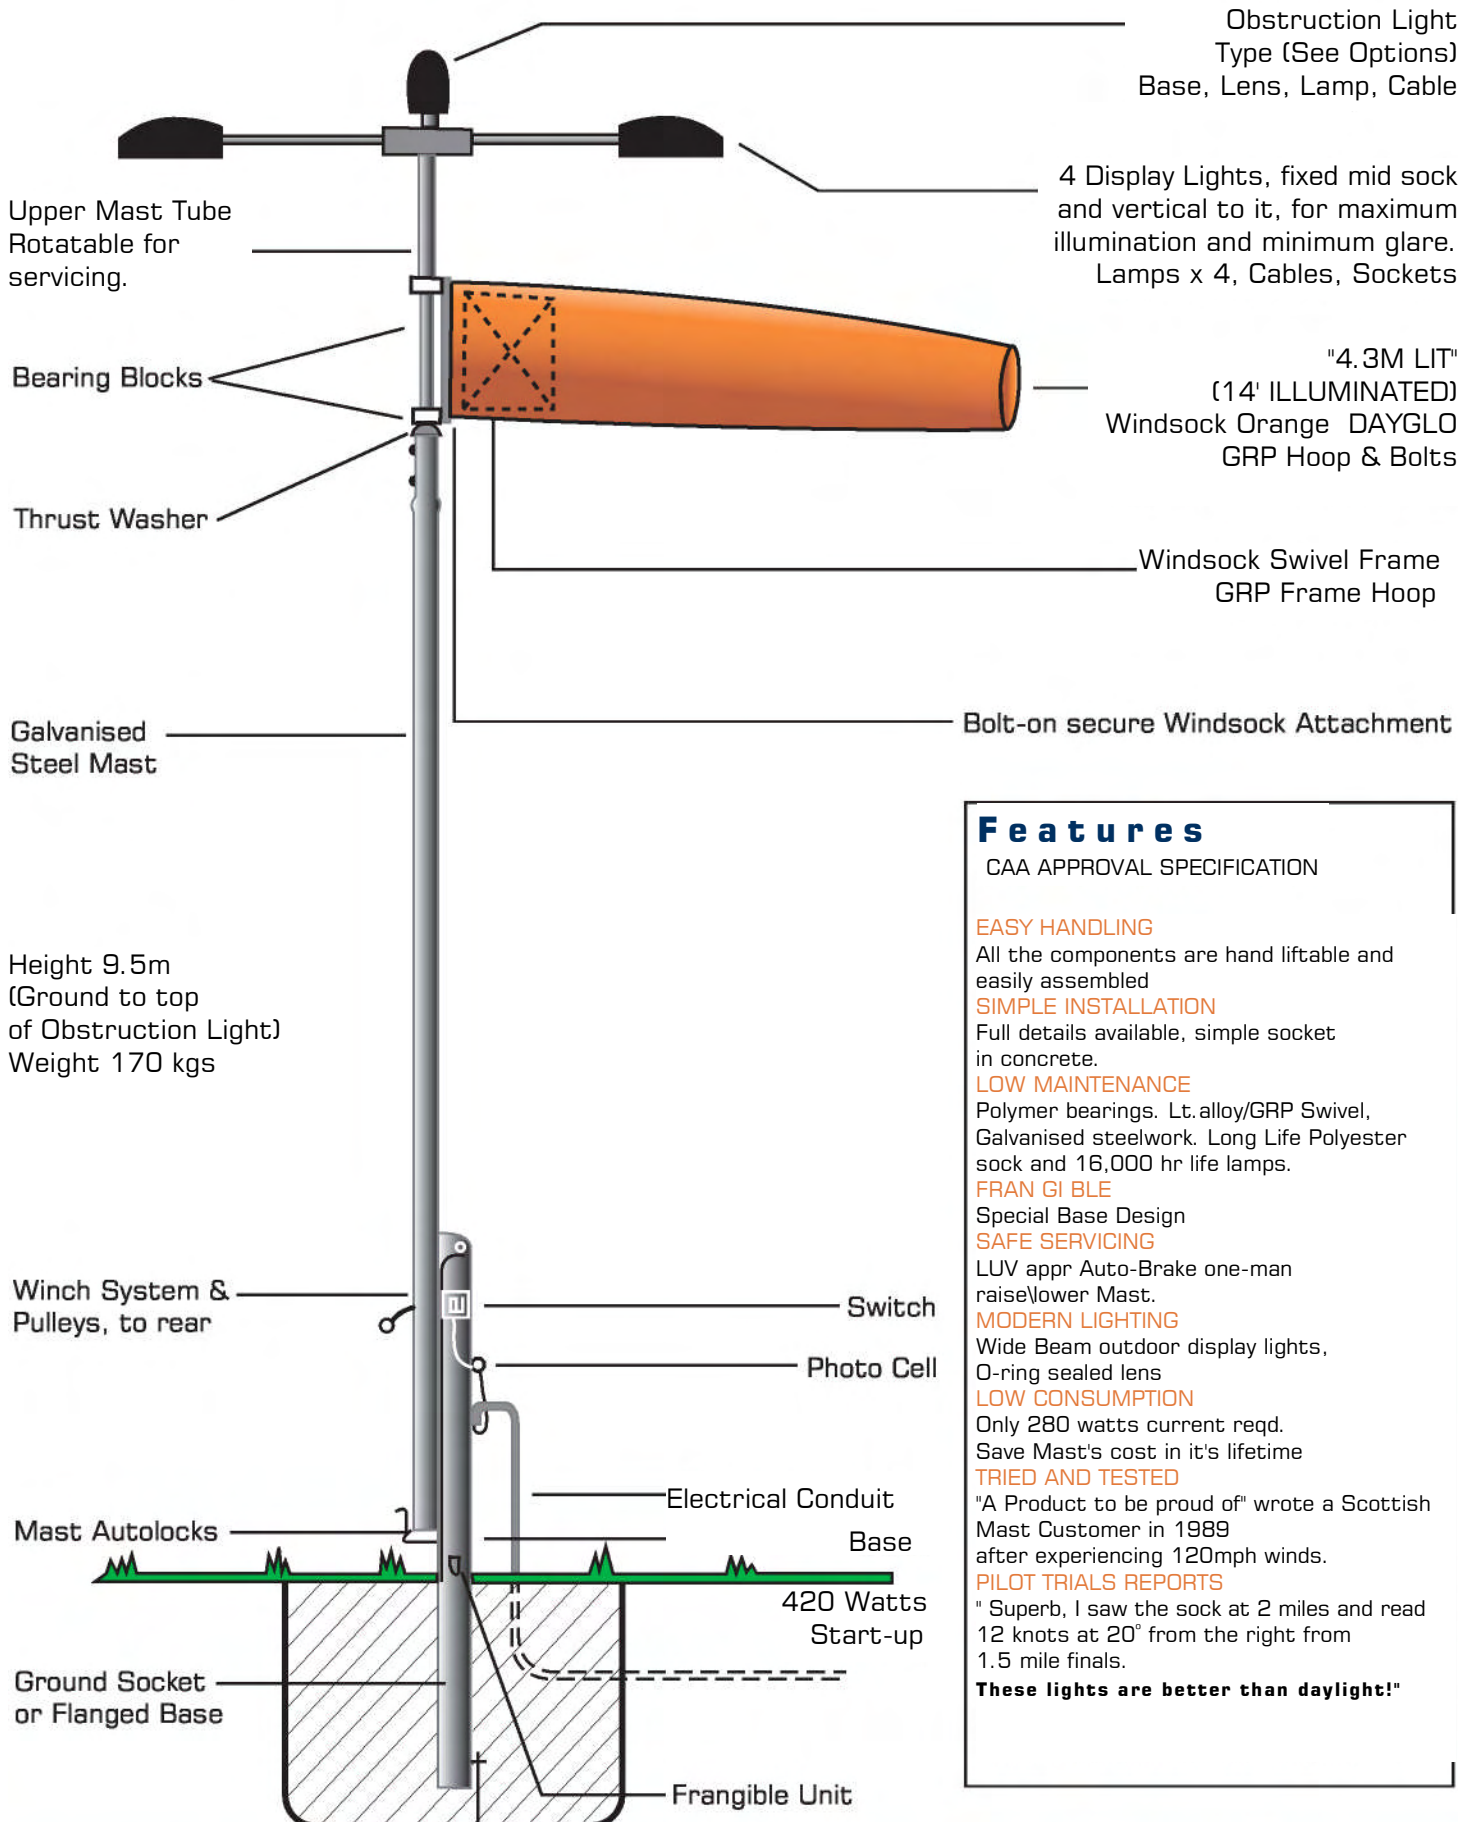

Features

CAA APPROVAL SPECIFICATION

EASY HANDLING

All the components are hand liftable and easily assembled

SIMPLE INSTALLATION

Full details available, simple socket in concrete.

LOW MAINTENANCE

Polymer bearings. Lt.alloy/GRP Swivel, Galvanised steelwork. Long Life Polyester sock and 16,000 hr life lamps.

FRANGIBLE

Special Base Design

SAFE SERVICING

LUV appr Auto-Brake one-man raise/lower Mast.

MODERN LIGHTING

Wide Beam outdoor display lights, O-ring sealed lens

LOW CONSUMPTION

Only 280 watts current reqd. Save Mast's cost in it's lifetime

TRIED AND TESTED

"A Product to be proud of" wrote a Scottish Mast Customer in 1989 after experiencing 120mph winds.

PILOT TRIALS REPORTS

" Superb, I saw the sock at 2 miles and read 12 knots at 20° from the right from 1.5 mile finals.

These lights are better than daylight!"



Available through AirfieldUK Ltd